

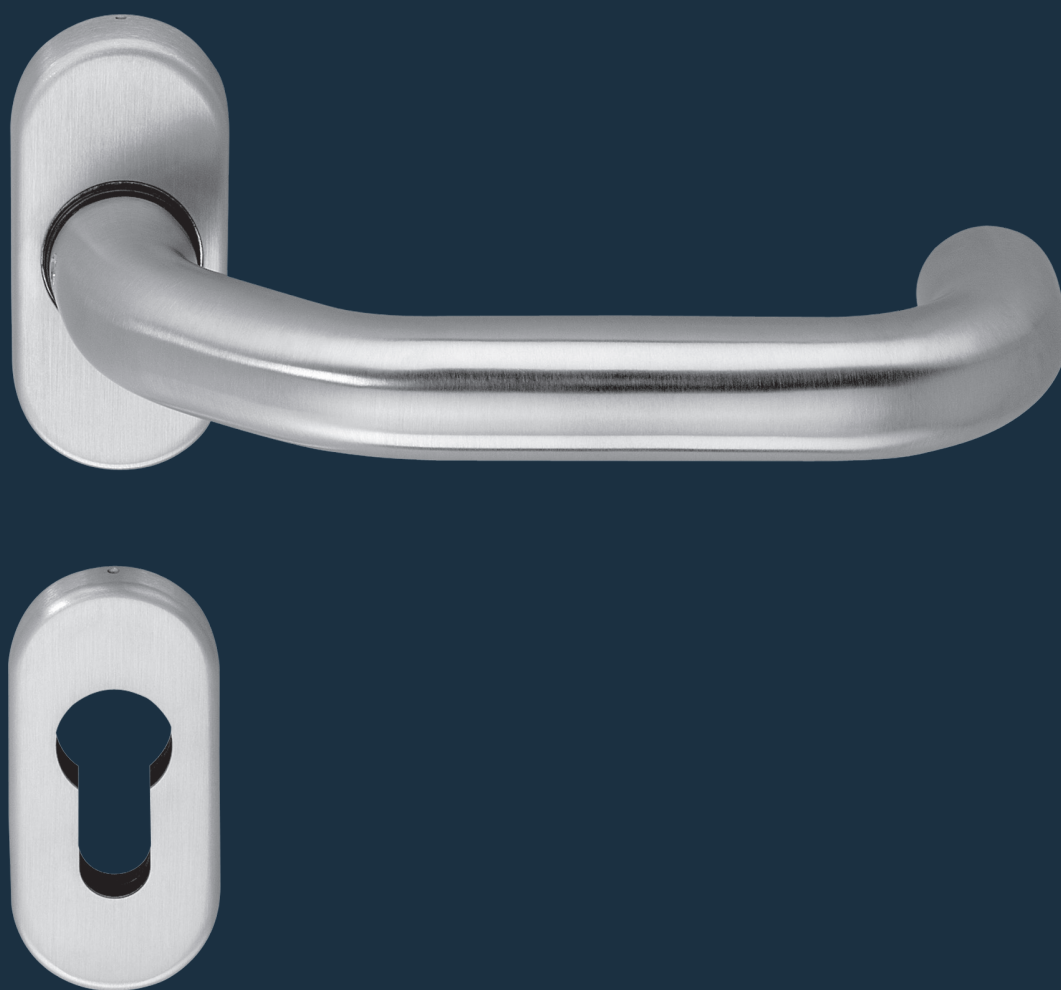



ECO D-116


Product information




■ SYSTEM TECHNOLOGY FOR THE DOOR



Product characteristics

Tested acc. to	EN 1906
With 9 mm spindle acc. to DIN 18273 fire protection tested	F
Lever form for escape doors and emergency exits	EN 179 
Restoring spring	■
Fixable bearing	■
Steel base with positioning studs	■
Concealed through-screw technology	■
DIN left / right	■

■ Yes - No □ Option

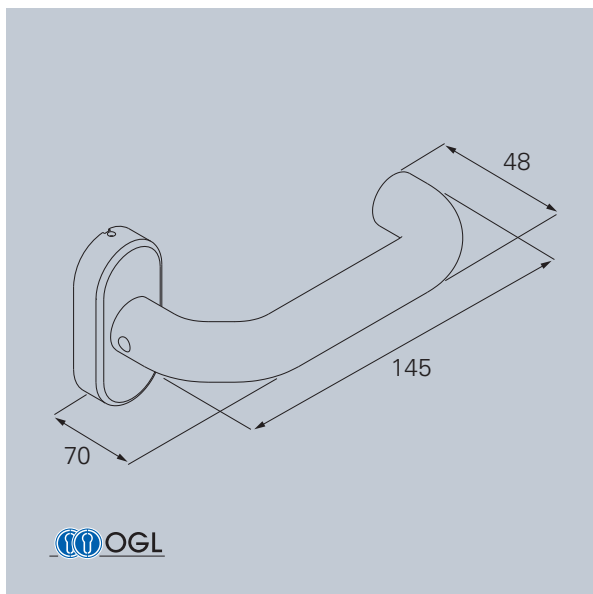

Profile frame door

Material:



Stainless Steel



Aluminium

PRODUCT FAMILY D-100

Standard handle

Handle on plate



D-110



D-120



D-190



D-110




D-110

Oval rose handle

Security handle

Window handle



D-115



D-116



D-110



D-111



D-116



F-110

D-116 Oval rose handle




D-116 Oval rose with OGL – friction bearing technology


Lever guidance consists of a closed, maintenance-free friction bearing with self-lubricating plastic. Available with fixed knob or turnable knob and powerful locking (spring support).

Bore diameter of Ø 23 mm at the lever collar necessary.

Utilization category: class 4

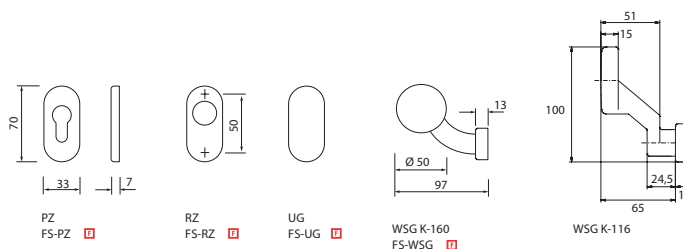

OGL – OVAL ROSE HANDLE












EN 1906

EN 179


F



			Kit sets			Knob			Escutcheon		
	Ø	□									
S	21 mm	8 mm	178402.46	186405.46	186410.46	178200.46	178202.46	178218.46	176850.46	176852.46	176851.46
F	21 mm	9 mm	178400.46	386405.46	386410.46	178200.46	178204.46	178217.46	176850.46	176852.46	176851.46

Finish: Stainless steel satin. PVD and polished on request.

*Base Escutcheon incl. fire-proof plate












EN 1906

EN 179

F



			Kit sets			Knob			Escutcheon		
	Ø	□									
S	22 mm	8 mm	178402.30	187405.30	187410.30	178200.30	178202.30	178218.46	176850.30	176852.30	176851.30
F	22 mm	9 mm	178400.30	387405.30	387410.30	178200.30	178204.30	178217.46	176850.30	176852.30	176851.30

Finish: F1 Aluminium anodized and F9, further colours on request

*Base Escutcheon incl. fire-proof plate



ECO D-116

The cranked U-form handle

A classic with value added: the advantage of the U-shaped handle lies in the second 90 degree bend. It was used traditionally to prevent people or material from getting "threaded on". The rear bend helps to prevent shopping bags or coat sleeves from getting caught in the handle.

The U-shaped handle also has comfort qualities, because the rear turn supports the ball of the hand when opening the door.

ECO Schulte has the U-shaped handle in its product range as factory design draft D-116 for profile frame doors.

ECO Schulte GmbH & Co. KG
Iserlohner Landstraße 89
D-58706 Menden

Telefon: +49 2373/92 76 - 0
Fax: +49 2373/92 76 - 40

info@eco-schulte.de
www.eco-schulte.de

© ECO Schulte GmbH & Co. KG - Änderungen vorbehalten
© ECO Schulte GmbH & Co. KG - Subject to change