






# ECO D-116 Security handle sets

## Product information




### ■ SYSTEM TECHNOLOGY FOR THE DOOR



### Product characteristics

Tested acc. to	EN 1906
With 9 mm spindle acc. to DIN 18273 fire protection tested	F
Lever form for escape doors and emergency exits	EN 179
Tested acc. to	DIN 18 257
Fixable bearing	■
Steel base in inner and outer plate	■
Concealed continuous triple screw connection.	■
Inside with lever	■
DIN left / right	■

■ Yes - No □ Option

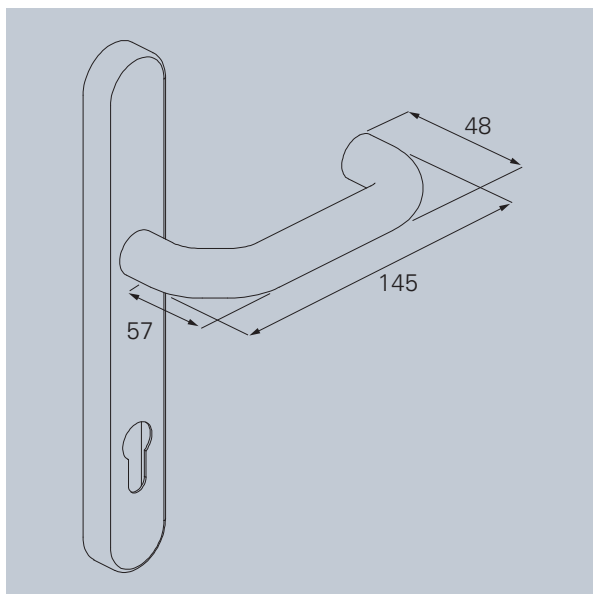

Profile frame door

Material:



Stainless Steel



Aluminium



### PRODUCT FAMILY D-100

#### Standard handle



D-110



D-120



D-190

#### Handle on plate




D-110



D-110

#### Oval rose handle



D-115



D-116

#### Security handle



D-110



D-111



D-116

#### Window handle



F-110

# D-116 Security handle set for profile frame doors



## D-116 Security handle set for profile frame doors with OGL – friction bearing technology


Fixed in maintenance-free bearing.

Anti-burglary protection class ES 1 / class 2.

Available with knob K-160.

Utilization category: class 4 / Outside: mounting height 15 mm

Distance 72 mm also available as FS version with 9 mm spindle

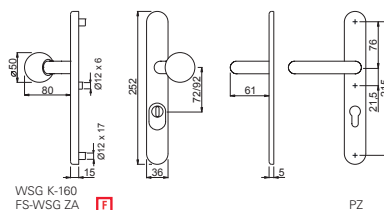


WSG K-160  
FS-WSG ZA

F

PZ

### OGL – SECURITY HANDLE SET FOR PROFILE FRAME DOORS










EN 1906


EN 179

F



				Kit sets PZ		Kit sets ZA	
	Ø	Distance	□				
	21 mm	72 mm	8 mm	822311.46	822341.46	822312.46	822342.46
	21 mm	92 mm	9 mm	824511.46	824541.46	824512.46	824542.46
	21 mm	92 mm	10 mm	826511.46	826541.46	826512.46	826542.46

Finish: Stainless steel satin, further colours on request










EN 1906

EN 179

F



				Kit sets PZ		Kit sets ZA	
	Ø	Distance	□				
	22 mm	72 mm	8 mm	822311.30	822341.30	822312.30	822342.30
	22 mm	92 mm	9 mm	824511.30	824541.30	824512.30	824542.30
	22 mm	92 mm	10 mm	826511.30	826541.30	826512.30	826542.30

Finish: Aluminium anodized, further colours on request.

The execution ZA is designed for cylinder projections of 11 – 14 mm.

For door thickness 38 – 45 mm. Fire-proof lever sets for door thickness 40 – 65 mm. Please advise door thickness when ordering.



## ECO D-100 U-shaped handle

A classic with value added: the advantage of the U-shaped handle lies in the second 90 degree bend. It was used traditionally to prevent people or material from getting "threaded on". The rear bend helps to prevent shopping bags or coat sleeves from getting caught in the handle.

The U-shaped handle also has comfort qualities, because the rear turn supports the ball of the hand when opening the door.

ECO Schulte has the U-shaped handle in its product range as factory design draft D-116.

ECO Schulte GmbH & Co. KG  
Iserlohner Landstraße 89  
D-58706 Menden

Telefon: +49 2373/92 76-0  
Fax: +49 2373/92 76-40

[info@eco-schulte.de](mailto:info@eco-schulte.de)  
[www.eco-schulte.de](http://www.eco-schulte.de)

© ECO Schulte GmbH & Co. KG - Änderungen vorbehalten  
© ECO Schulte GmbH & Co. KG - Subject to change