

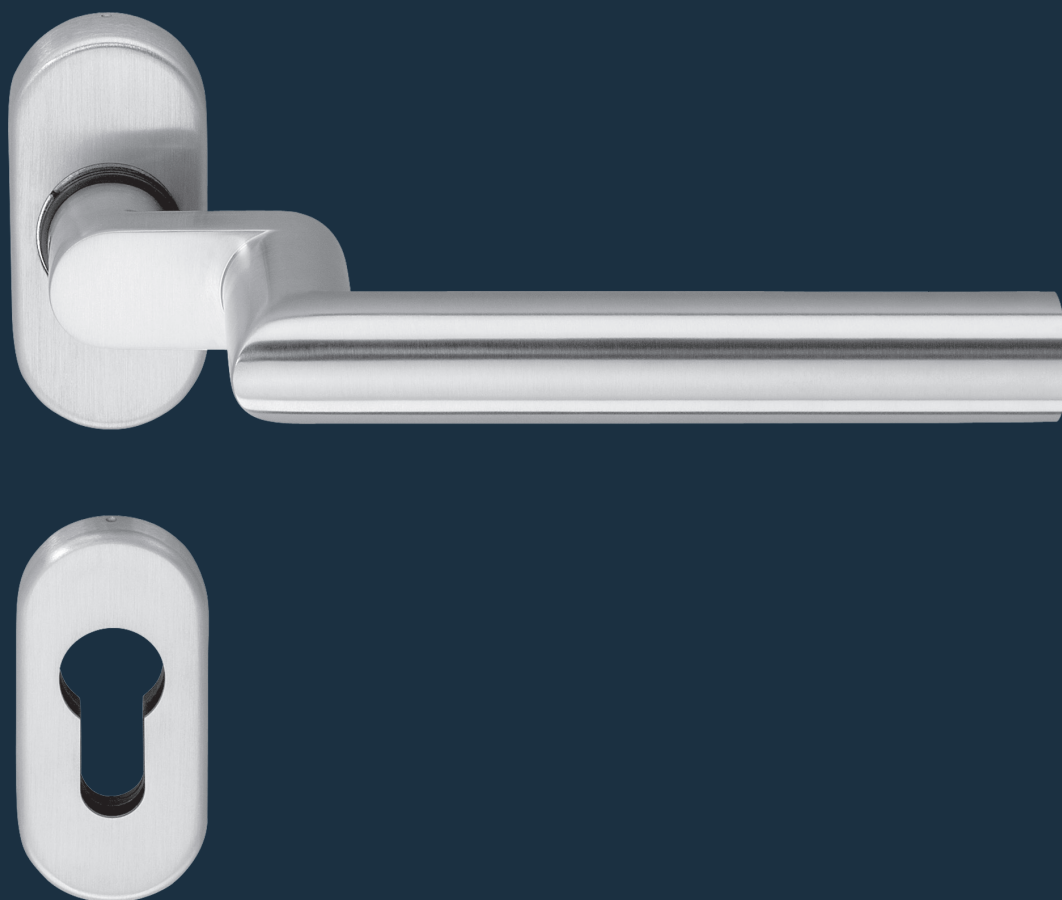



ECO D-315

Product information




■ SYSTEM TECHNOLOGY FOR THE DOOR



Product characteristics

Tested acc. to	EN 1906
With 9 mm spindle acc. to DIN 18273 fire protection tested	F
Lever form for escape doors and emergency exits	-
Restoring spring	■
Fixable bearing	■
Steel base with positioning studs	■
Concealed through-screw technology	■
DIN left / right	■

■ Yes - No □ Option

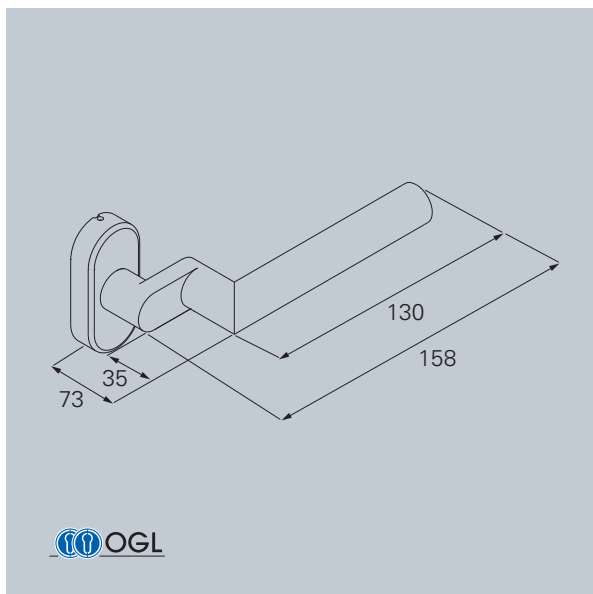

Profile frame door

Material:



Stainless Steel



Aluminium

PRODUCT FAMILY D-300

Standard handle



D-310



D-330

Handle on plate



D-330




D-330


Oval rose handle



D-310



D-315



D-335

Security handle



D-310




D-315

Window handle



F-310

D-315 Oval rose handle

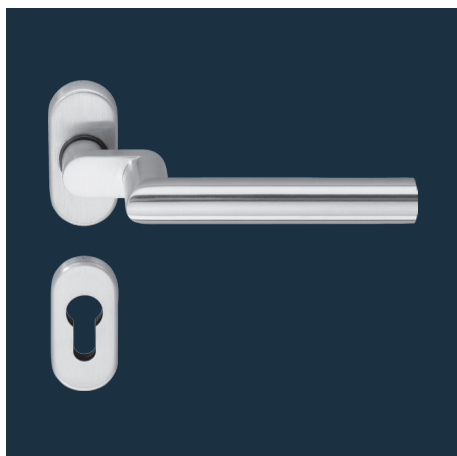


D-315 Oval rose with OGL – friction bearing technology


Lever guidance consists of a closed, maintenance-free friction bearing with self-lubricating plastic. Available with fixed knob or turnable knob and powerful locking (spring support).





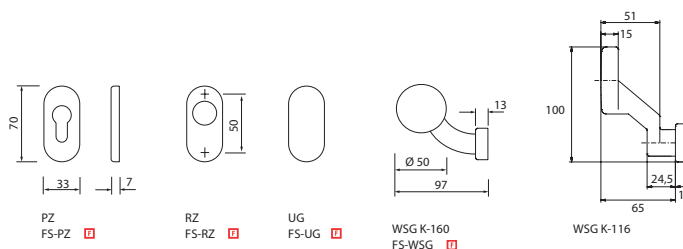







Bore diameter of Ø 23 mm at the lever collar necessary.

Utilization category: class 4



OGL – OVAL ROSE HANDLE



EN 1906 














			Kit sets			Knob				Escutcheon		
	Ø	□										
	21 mm	8 mm	178422.46	185205.46	185210.46	1017821746	178200.46	178202.46	178218.46	176850.46	176852.46	176851.46
	21 mm	9 mm	178420.46	385205.46	385210.46	1017821746	178200.46	178204.46	178217.46	176850.46	176852.46	176851.46

Finish: Stainless steel satin. PVD and polished on request.

*Base Escutcheon incl. fire-proof plate

OGL – OVAL ROSE HANDLE


EN 1906 


			Kit sets			Knob				Escutcheon		
	Ø	□										
	21 mm	8 mm	178422.30	185205.30	185210.30	1017821730	178200.30	178202.30	178218.30	177850.30	177852.30	177851.30
	21 mm	9 mm	178420.30	385205.30	385210.30	1017821730	178200.30	178204.30	178217.30	177850.30	177852.30	177851.30

Finish: F1 Aluminium anodized and F9, further colours on request **

*Base Escutcheon incl. fire-proof plate

** Please see our notes on Compendium on page 673.

For door thickness 38 – 45 mm. Fire-proof lever sets for door thickness 40 – 65 mm. Please advise door thickness when ordering.



ECO D-300

Frankfurt mitred handle

The ECO D-300 is a variation of a geometric handle draft design from the 1920s which stands out through the legible simplicity of the construction: a circular tube is separated with a mitred cut before the two halves are joined together again at right angles.

This handle was given the attribute "Frankfurt" not only through its close geometric relationship with the Frankfurt standard handle but also because it was used when the Frankfurt Architecture Museum was built.

ECO Schulte has included its interpretation of the Frankfurt mitred handle in its product range as factory design draft D-315 for profile frame doors.

ECO Schulte GmbH & Co. KG
Iserlohner Landstraße 89
D-58706 Menden

Telefon: +49 2373/92 76 - 0
Fax: +49 2373/92 76 - 40

info@eco-schulte.de
www.eco-schulte.de

© ECO Schulte GmbH & Co. KG - Änderungen vorbehalten
© ECO Schulte GmbH & Co. KG - Subject to change