






ECO D-315 Security handle sets

Product information




■ SYSTEM TECHNOLOGY FOR THE DOOR



Product characteristics

Tested acc. to	EN 1906
With 9 mm spindle acc. to DIN 18273 fire protection tested	F
Tested acc. to	DIN 18 257
Fixable bearing	■
Steel base in inner and outer plate	■
Concealed continuous triple screw connection.	■
Inside with lever	■
DIN left / right	■

■ Yes - No □ Option

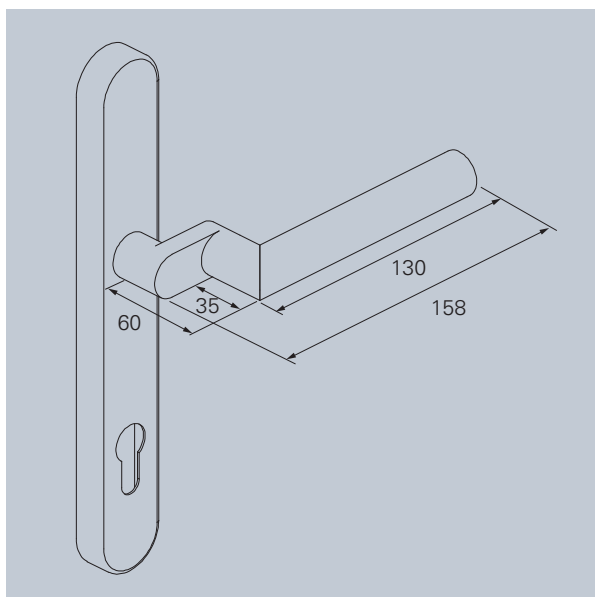

Profile frame door

Material:



Stainless Steel



Aluminium



PRODUCT FAMILY D-300

Standard handle



D-310



D-330

Handle on plate



D-330




D-330


Oval rose handle



D-310



D-315



D-335

Security handle



D-310



D-315

Window handle



F-310

D-315 Security handle set for profile frame doors OGL



D-315 Security handle set for profile frame doors with OGL – friction bearing technology


Fixed in maintenance-free bearing.

Anti-burglary protection class ES 1 / class 2. Available with knob K-160.

Utilization category: class 4

Outside: mounting height 15 mm.

Distance 72 mm also available as fire protection version with 9 mm spindle

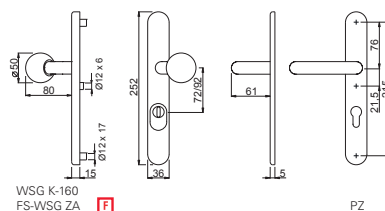

OGL – SECURITY HANDLE SET FOR PROFILE FRAME DOORS




EN 1906

F



				Kit sets PZ		Kit sets ZA	
	Ø	Distance	▣				
	21 mm	72 mm	8 mm	852311.46	852341.46	852312.46	852342.46
	21 mm	92 mm	9 mm	854511.46	854541.46	854512.46	854542.46
	21 mm	92 mm	10 mm	856511.46	856541.46	856512.46	856542.46

Finish: Stainless steel satin, further colours on request



EN 1906

F



				Kit sets PZ		Kit sets ZA	
	Ø	Distance	▣				
	22 mm	72 mm	8 mm	882311.30	882341.30	882312.30	882342.30
	22 mm	92 mm	9 mm	884511.30	884541.30	884512.30	884542.30
	22 mm	92 mm	10 mm	886511.30	886541.30	886512.30	886542.30

Finish: Aluminium anodized, further colours on request.

ECO Schulte GmbH & Co. KG
Iserlohner Landstraße 89
D-58706 Menden

Telefon: +49 2373/92 76 - 0
Fax: +49 2373/92 76 - 40

info@eco-schulte.de
www.eco-schulte.de

© ECO Schulte GmbH & Co. KG - Änderungen vorbehalten
© ECO Schulte GmbH & Co. KG - Subject to change