




ECO Project hinge OBX-20-1531/120

Product information



■ SYSTEM TECHNOLOGY FOR THE DOOR



OBX-20-1531/120




Product characteristics


Size		120 mm
Ø Barrel diameter		20 mm
Material thickness		3,5 mm
Screws		5 x 50 mm
DIN left / DIN right		■
Milling diameter		24 mm
Milling length		120 mm
Milling depth		3,5 mm
Door types	Rebated	■
	Flush with the adjacent areas	-
Frame types	Wood	■
	Steel	■
	Aluminium	■
Suitable for fire doors		■
Loading capacity Class 14 (maximum door load)		■
	Norm	160 kg
	ECO loading capacity	200 kg
Finishes	Stainless steel (ER)	■
	ER polished	□
	PVD coating (brass)	□
	PVD coating in RAL colours	□
Reception elements	For upright standing pillars	OBX-3001-3D
	For timber frames	OBX-3002-3D
	For steel frames	OBX-3011-3D
		OBX-3012-3D
	For aluminium frames	OBX-3021-3D

■ Yes - No □ On request


Dimension drawing

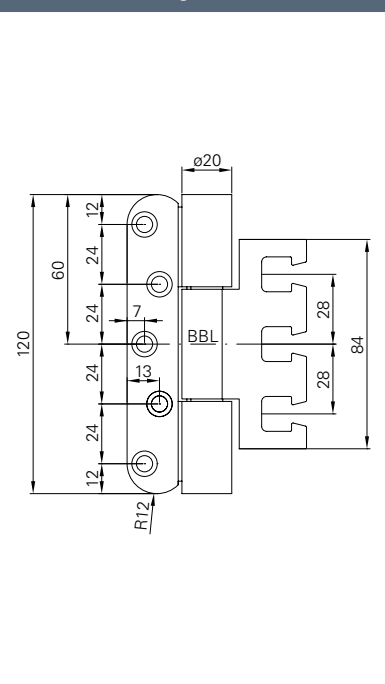

Milling drawing

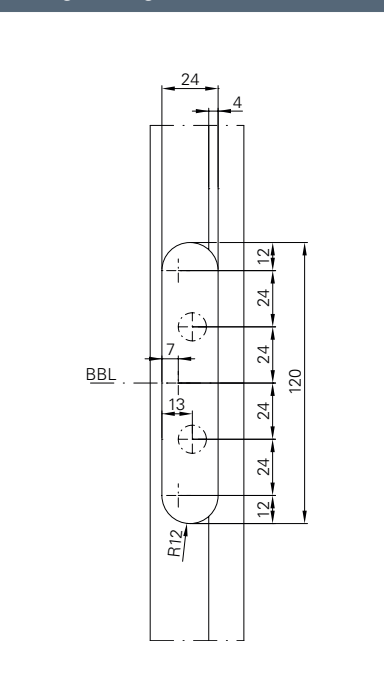

Top view

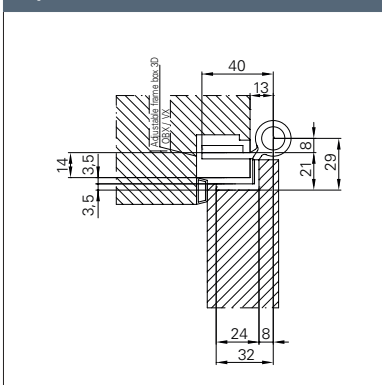



ECO

Project hinges ■ OBX-20 ■ Mortise rebated door 3D hinge

PRODUCT FAMILY ■ MORTISE REBATED DOOR 3D HINGE



OBX-20-1531/160.ER



OBX-20-1532/160.ER
OBX-20-1532/120.ER



OBX-20-1951/160.ER
OBX-20-1951/120.ER



Description

ECO project hinge OBX-20-1531/120

- For rebated doors on wooden, steel or aluminium frames
- With OBX adjustable frame box adjustable in three dimensions
- Inner, firmly rotating axis
- Wear and maintenance-free ball bearing technology
- Suitable for fire doors
- Can be used DIN left and DIN right without modification



EN 1935



Wooden door

OBX-20-1531 Mortise rebated door 3D hinge	Dimensions	Article number
OBX-20-1531/120.ER	Ø 20 x 120 mm	459131.46

ECO Schulte GmbH & Co. KG
Iserlohner Landstraße 89
D-58706 Menden

Telefon: +49 2373/92 76 - 0
Fax: +49 2373/92 76 - 40

info@eco-schulte.de
www.eco-schulte.de

© ECO Schulte GmbH & Co. KG - Änderungen vorbehalten
© ECO Schulte GmbH & Co. KG - Subject to change