






ECO Project hinge OBX-20-2542/120

Product information



■ SYSTEM TECHNOLOGY FOR THE DOOR



OBX-20-2542/120




Product characteristics


Size		120 mm
Ø Barrel diameter		20 mm
Material thickness		3,5 mm
Screws		5 x 50 mm
DIN left / DIN right		■
Milling diameter		24 mm
Milling length		120 mm
Milling depth		3,5 mm
Door types	Unrebated	■
	Double rebated	■
Frame types	Wood	■
	Steel	■
	Aluminium	■
Suitable for fire doors	F	■
Loading capacity Class 14 (maximum door load)	EN 1935 CE	■
	Norm	160 kg
	ECO loading capacity	200 kg
Finishes	Stainless steel (ER)	■
	ER polished	▣
	PVD coating (brass)	▣
	PVD coating in RAL colours	▣
Reception elements	For upright standing pillars	OBX-3001-3D
	For timber frames	OBX-3002-3D
	For steel frames	OBX-3011-3D OBX-3012-3D
	For aluminium frames	OBX-3021-3D

■ Yes - No □ On request


Dimension drawing

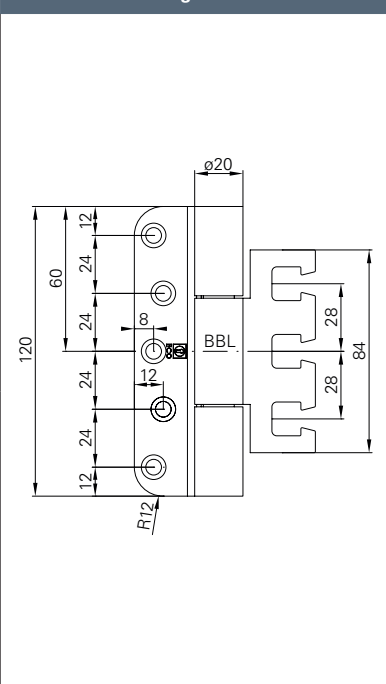

Milling drawing

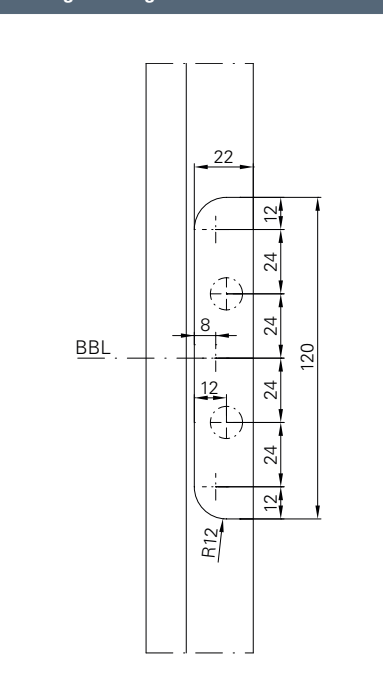

Top view

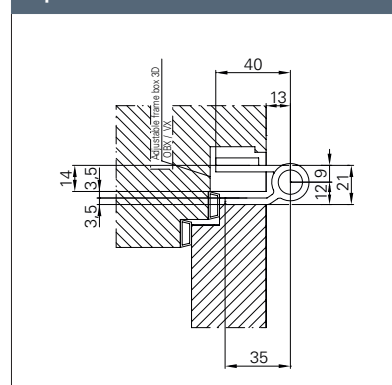



ECO

PRODUCT FAMILY ■ MORTISE FLUSH DOOR 3D HINGE



OBX-20-2541/160.ER



OBX-20-2542/160.ER
OBX-20-2542/120.ER



Description

ECO project hinge OBX-20-2542/120

- For mortise flush door 3D hinge, double rebated, on wooden, steel or aluminium frames
- With OBX adjustable frame box adjustable in three dimensions
- Inner, firmly rotating axis
- Wear and maintenance-free ball bearing technology
- Suitable for fire doors
- Can be used DIN left and DIN right without modification

F **EN 1935** **CE** **ER**  Wooden door

OBX-20-2542 mortise flush door 3D hinge double rebated	Dimensions	Article number
OBX-20-2542/120.ER	Ø 18 x 120 mm	459142.46

ECO Schulte GmbH & Co. KG
Iserlohner Landstraße 89
D-58706 Menden

Telefon: +49 2373/92 76-0
Fax: +49 2373/92 76-40

info@eco-schulte.de
www.eco-schulte.de

© ECO Schulte GmbH & Co. KG - Änderungen vorbehalten
© ECO Schulte GmbH & Co. KG - Subject to change